




# Product Spec Sheet

- Installation Guide
- Hardwax Oil Maintenance Guide
- Polyurethane Maintenance Guide
- Warranty Information

## WEST|WOOD ARCHITECTURAL SURFACES

### HOOK Beautiful Brown Color Collection

Hook, a rigid caramel color with serrations like tree coils, portrays a rugged earthy tone.

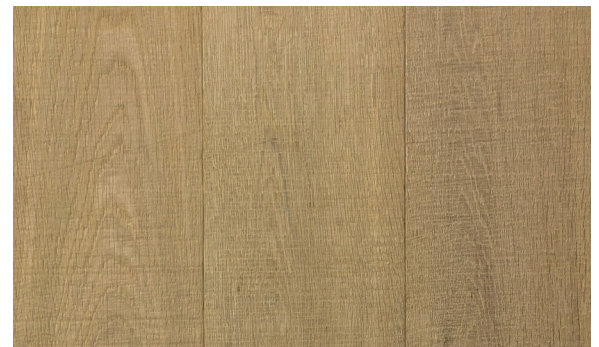

#### Specification Options for White Oak

Other species are available (see below) but may have different specifications to consider.

#### Design Elements

|                            |   |
|----------------------------|---|
| SPECIES                    | White Oak (American, European or French), Red Oak,<br>  Walnut, Maple, Hickory, Pine & other preferred species                  |
| PATTERNS                   | Bordeaux, Chevron, Haddon Hall, Herringbone,<br>  Marie Antoinette, Versailles or Custom  |
| CUTS OF WOOD               | Plain Sawn, Live Sawn, Rift Sawn,<br>  Quarter Sawn & R&Q Sawn  |
| GRADE QUALITY              | Perfect, Clear, Select & Better, Character, Rustic & Prime  |
| TEXTURES                   | Smooth, Wire Brushed, Hand Scraped,<br>  Band Sawn, Distressed & French Bleed   |
| PRE-TREATMENTS<br>& STAINS | Bleach & Water Treatments, Water-Based Stains,<br>  Aniline Dyes, Cerused, Fuming<br>  & Other Specialty Branded Pre-Treatments |
| TOP COATS                  | Hardwax Oil, Polyurethane (Oil- & Water-Based), Wax,<br>  Tung Oil & Moisture Cure & Conversion Varnish                         |

#### Production Elements

|                           |  |
|---------------------------|--|
| CONSTRUCTION              | Engineered or Solid  |
| ENGINEERED<br>WIDTHS      | 5-1/2", 6", 7", 8", 9-1/2", 10-1/4" & 12" options with<br>  a Baltic Birch core that contains between 8 & 11<br>  plies. Or 11-1/2", 13-1/2", 15-1/2" & 17-3/4" using<br>  balanced Oak (Oak top and bottom) with 8 plies. |
| SOLID WIDTHS              | 4-3/8"-8",<br>  with custom widths available upon request  |
| ENGINEERED<br>THICKNESSES | 1/2", 5/8" & 3/4"<br>  |
| SOLID<br>THICKNESS        | 3/4"<br>   |
| ENGINEERED<br>LENGTHS     | 2'-8", 2'-10', 4'-8', 4'-10', 6'-10' & 6'-14-1/2',<br>  depending upon the material selected   |
| SOLID LENGTHS             | 1'-7", 1'-8", 2'-8", 2'-10', 3'-10', 6'-10', 6'-12',<br>  with possible longer options   |
| ENGINEERED<br>WEAR LAYERS | 3mm, 4mm, 5mm & 6mm options,<br>  based upon material selected   |

info@westflooring.com | westflooring.com

Long Island // 4195 Middle Country Road, Unit 5, Calverton, NY / 631.821.8994 | NYC // 150 East 58th Street, Suite 720, New York, NY / 212.621.9120